Technical sheet:

## HIGH CAPACITY AGRICULTURAL BUCKET





## **Benefits**


- Ideal bucket for bulk products (cereals, woodchip, mineral feed etc.)
- Modern design with maximal rigidity and resistance. Durable and resistant bucket.
- Improved shape designed with 3° angle for quick loading and unloading operation.
- 500HB bolt-on cutting edge (LDR) for more longevity.

## **Technical characteristics**

- Bulk product bucket suitable for handling materials with a density  $\leq 1$ .
- Reinforced structure (base, blade and sides).

| Capacities                 |     | CBA 2500 / 4000 LDR        | CBA 2700 / 4500 LDR        |
|----------------------------|-----|----------------------------|----------------------------|
| Capacity (kg)              |     | 4007                       | 4550                       |
| Heaped Capacity (I)        |     | 4007                       | 4550                       |
| Struck capacity (I)        |     | 3195                       | 3617                       |
| Weight and dimensions      |     |                            |                            |
| Overall height (mm)        | h17 | 1517                       | 1677                       |
| Width (mm)                 |     | 2500                       | 2700                       |
| Length (mm)                |     | 1700                       | 1700                       |
| Overall weight (kg)        |     | 1310                       | 1400                       |
| Working Parameters         |     |                            |                            |
| Machine Equipement         |     | No predisposition required | No predisposition required |
| Other Data for Attachments |     |                            |                            |
| Bolted wearplate (LDR)     |     | standard                   | standard                   |
| Wear plate hardness        |     | 500                        | 500                        |

| Machines compatibility | CBA 2500 / 4000 LDR | CBA 2700 / 4500 LDR |
|------------------------|---------------------|---------------------|
| Reference Number       | 52603178            | 52000508            |
| MLT 961-145 V+ L       | X                   | X                   |
| MLT-X 961-145 V+ L     | X                   | X                   |

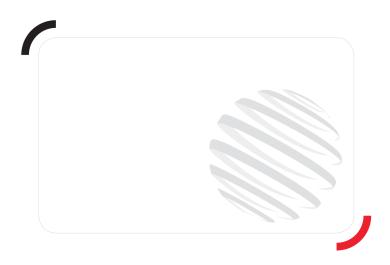



Siège Social 430 rue de l'Aubinière - 44150 Ancenis Cedex - France Tel: +33(0)2 40 09 10 11 - Fax: +33 (0)2 40 09 10 97 www.manitou.com



This brochure describes versions and configuration options for Manitou products which may be fitted with different equipment. The equipment described in this brochure may be standard, optional or not available depending on version. Manitou reserves the right to change the specifications shown and described at any time and without prior warning. The manufacturer is not liable for the specifications given. For more information, contact your Manitou dealer. Non-contractual document. Product descriptions may differ from actual products. List of specifications is not comprehensive. The logos and visual identity of the company are the property of Manitou and may not be used without authorisation. All rights reserved. The photos and diagrams contained in thisbrochure are provided for information only.

MANITOU BF SA - Limited company with board of directors - Share capital: 39,668,399 euros - 857 802 508 RCS Nantes