

YOUR ATTACHMENT SPECIALIST




DEMOLITION / SORTINGGRAB

**TOP QUALITY
AVAILABLE
FROM STOCK**



- Hardox® scales
- High closing force
- Rechangeable blades
- Available with or without rotation

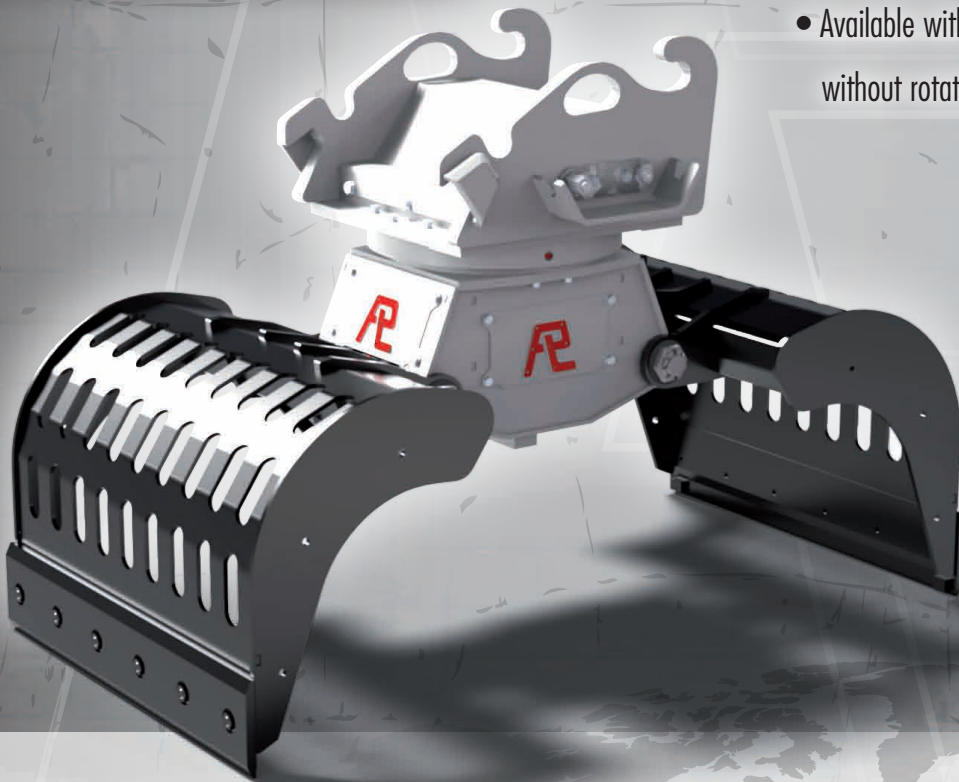

3 years
warranty



Pladdet



Pladdet bv
Paulinaweg 6-10
4521 RE Biervliet
The Netherlands


Tel. 0031 115 - 48 13 51
Fax 0031 115 - 48 20 54

Mail: info@pladdet.nl
Website: www.pladdet.biz

www.pladdet.biz



Pladdet



Type: (ROTATION)	Machine-range	Weight*	Height	Width	Max. spread	Volume	Closing force	Work pressure rotation	Oilflow rotation (max)	Work pressure (open/close)	Oilflow (open/close)
	(ton)	(Kg)	(mm)	(mm)	(mm)	(liter)	(kn)	(bar)	(liter/min.)	(bar)	(liter/min.)
PRG0-30-EX	0.7 – 1.4	70	630	300	600	30	6	150	5	300	15
PRG1-70-EX	1.5 – 4	167	810	400	900	70	18	150	10	300	25
PRG1-100-EX	1.5 – 4	182	810	500	900	100	18	150	10	300	25
PRG2-150-EX	4 – 9	354	960	500	1500	150	24	150	15	300	40
PRG2-200-EX	4 – 9	368	960	600	1500	200	24	150	15	300	40
PRG2-300-EX	4 – 9	415	960	850	1500	300	24	150	15	300	40
PRG3-350-II-EX	12 – 19	813	1240	625	1900	350	46	210	25	350	120
PRG3-400-II-EX	12 – 19	831	1240	700	1900	400	46	210	25	350	120
PRG3-500-II-EX	12 – 19	877	1240	850	1900	500	46	210	25	350	120
PRG3-600-II-EX	12 – 19	927	1240	1050	1900	600	46	210	25	350	120
PRG3-700-II-EX	12 – 19	959	1240	1200	1900	700	46	210	25	350	120
PRG4-700-II-EX	18 – 30	1354	1508	950	2100	700	84	210	35	350	160
PRG4-800-II-EX	18 – 30	1410	1508	1100	2100	800	84	210	35	350	160
PRG4-900-II-EX	18 – 30	1460	1508	1250	2100	900	84	210	35	350	160
PRG4.5-1000-II-EX	28 – 38	2200	1800	1200	2300	1000	90	210	35	350	240
PRG4.5-1100-II-EX	28 – 38	2300	1800	1300	2300	1100	90	210	35	350	240
PRG4.5-1300-II-EX	28 – 38	2400	1800	1500	2300	1300	90	210	35	350	240
PRG5-1000-II-EX	32 – 50	2530	1800	1210	2300	1000	90	210	35	350	240
PRG5-1100-II-EX	32 – 50	2600	1800	1310	2300	1100	90	210	35	350	240
PRG5-1300-II-EX	32 – 50	2720	1800	1510	2300	1300	90	210	35	350	240



Type: (NON-ROTATION)	Machine-range	Weight*	Height	Width	Max. spread	Volume	Closing force	Work pressure	Oilflow (open/close)
	(ton)	(Kg)	(mm)	(mm)	(mm)	(liter)	(kn)	(bar)	(liter/min.)
PG1-70-EX	1.5 – 4	134	655	400	900	70	18	300	25
PG1-100-EX	1.5 – 4	151	655	500	900	100	18	300	25
PG2-150-EX	4 – 9	308	820	500	1500	150	24	300	40
PG2-200-EX	4 – 9	326	820	600	1500	200	24	300	40
PG2-300-EX	4 – 9	372	820	850	1500	300	24	300	40
PG3-350-II-EX	12 – 19	621	1000	625	1900	350	46	350	120
PG3-400-II-EX	12 – 19	639	1000	700	1900	400	46	350	120
PG3-500-II-EX	12 – 19	685	1000	850	1900	500	46	350	120
PG3-600-II-EX	12 – 19	737	1000	1050	1900	600	46	350	120
PG3-700-II-EX	12 – 19	769	1000	1200	1900	700	46	350	120
PG4-700-EX	18 – 30	1219	1245	950	2100	700	84	350	160
PG4-800-EX	18 – 30	1289	1245	1100	2100	800	84	350	160
PG4-900-EX	18 – 30	1359	1245	1250	2100	900	84	350	160

Scantruck – Katkjærvej 5 – DK -7800 SKIVE – DENMARK – Phone: + 45 96 147 147